

Double Skin
Partitioning



Fully glazed



Solid / Glazed / Solid above




Solid / Glazed above



Solid full height



Individual component breakdown

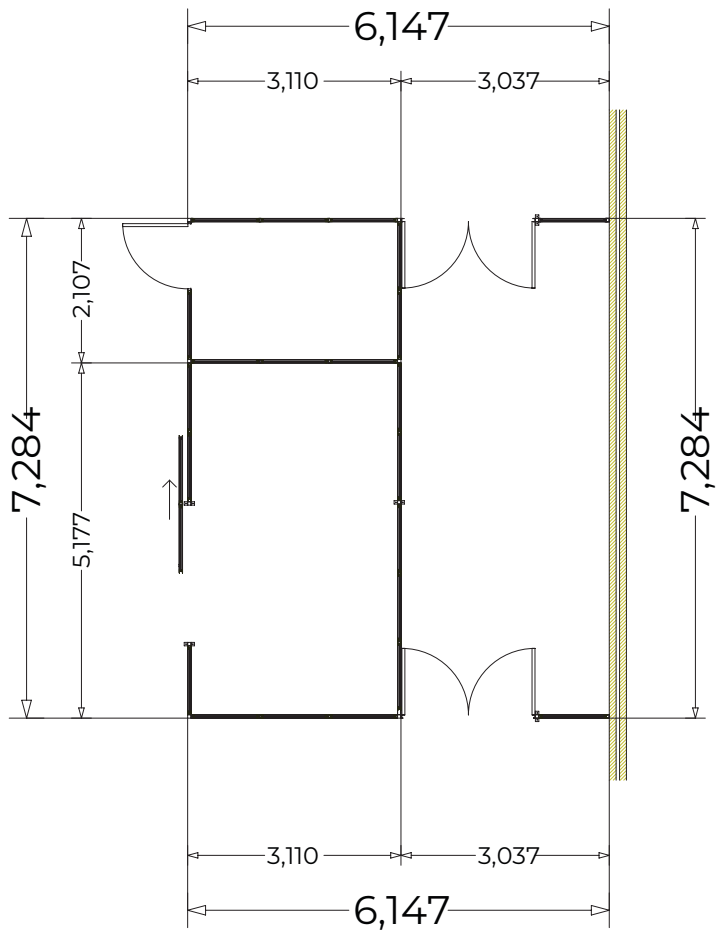

TYPICAL DOUBLESKIN FLOORPLAN LAYOUT

An alternative higher quality partitioning system
where a smooth interior finish or good sound reduction
is required. Ideal for works offices, clean rooms and
storage areas for chemicals and food products.

SPECIFICATION:

Panels are constructed from 25.4 x 42 x 25.4 x 1.2 mm (18g) cold rolled channels panelled both sides with 0.8 mm (21g) CR4 mild steel sheet with 30 mm Rockwool mineral fibre infill and are joined together using an 'H' section. Panels are available in solid, half-glazed, solid/glazed/solid or borrowed light elevation.

Choice of powder coated finishes.

Demountable and relocatable.

Ceiling solutions available to complement our partitioning.

STANDARD PANEL SIZES:

Height	2,400, 2,700, 3,000 mm
Width	1,000 mm
Dado Height	1,200 mm
Thickness	47 mm

A range of infill and special sized panels can be supplied to achieve final dimensions.

Side hung and sliding door options available.

MULLION SIZES:

50 x 50 x 2.5 mm up to 2,700 mm high
80 x 40 x 2.5 mm 2,700 mm and above
100 x 50 x 3.0 mm to suit installation

All Two-Way (intermediate) mullions have base plates for floor fixing. Knee braces and/or ladder mullions may be fitted for extra stability and strength.