

Personal storage solutions

Free no obligation survey and quotation service

Call: **0800 975 4933**



Contents

Locker Features

Accessories

Full height lockers
Three-quarter
height lockers
Half height lockers
Colour Options
Door Options
Lock Options
Quarto lockers
Sixto lockers
Cube lockers

Locker Room Design

Utilty Lockers
Crew Lockers

Medium Duty Lockers

Stronghold Heavy Duty Lockers

Garment Dispensers

Laptop Lockers
Personal Item
Lockers
Post Lockers

Laminate Door

Wooden Door Lockers

Aluminium Laminate Door Lockers

Seating and Benching

Security & Standard Cupboards

Slim, Large Volume, Vision and Storage Cupboards

Tool Cabinets

Hazardous Substance Cupboards

Delivering

the right solution for you

Moresecure lockers and cupboards are designed and manufactured to a high specification to meet any personal storage requirements.

They are built for a long efficient working life in factories, hospitals, schools, colleges, retail outlets - in fact anywhere needing tough, reliable and asethetic storage. Their modular design makes these lockers and cupboards extremely adaptable and cost effective. Units can be specified from a wide range with a choice of locks, doors, colours and accessories, allowing lockers and cupboards to be tailored to a customers precise needs.

Our experience and expertise has enabled us to put together a proven product range, designed to conform to BS 4680 standards and manufactured in the UK to internationally recognised quality and environmental ISO standards. This reflects our commitment to producing the best products whilst reducing environmental impact in the design and manufacturing process.

Free site visit and design

We will gladly come and discuss your requirements and help you plan your locker or cupboard needs. We will survey the room or area and produce a layout for your approval. Installation, if required, is undertaken by our appointed fitters, who ensure your job is installed to your satisfaction with the minimum of disruption and mess.



Proven Products



Robust Design

- All doors have an all-round reinforcing edge, spot-welded at each corner to enhance strength and rigidity.
- A welded vertical channel section stiffens the door for protection against impact damage.
- Steel three-knuckle hinges are welded to the door and riveted to the frame to give added strength and allow for easy replacement of damaged doors.
- Complying with BS 4680, a close fit between the door and the frame of less than 2mm protects against leverage in attempted forced entry.
- Colours are applied electro-statically as an epoxy-polyester powder coat, then baked to provide a high quality, durable finish.





Integral Security

Locking

- Features in-frame locking through the door with a hooked cam engaging into the frame.
- This provides extra security by significantly increasing resistance to forced entry.



 The design of the intermediate shelf prevents access to compartments above and below an open door.



 The lock cover plate and handle provides recesses to accept compartment numbering or identification.







BS 4680 - the standard for clothes lockers



Our standard duty lockers have been tested and conform to the requirements of the British Standard for Clothes Lockers BS 4680: 1996 'Standard Duty'.

BioCote ® - bacteria locked out

- BioCote® antimicrobial technology is incorporated into all Moresecure lockers and cupboards at the time of manufacture, offering constant protection against a wide range of bacteria.
- Field tests prove that storage equipment treated with BioCote® powder coating benefits from a 94% reduction in bacteria on their surface, helping create a cleaner and more hygienic working environment.



Accessories for tailored solutions



Sloping Tops for lockers

Sloping tops are essential in hygienesensitive locations such as hospitals and the food industry. The 22 degree slope prevents litter being left on locker tops and makes cleaning easier.

Dimensions mm			
Locker Depth Top Height			
300	125		
380	158		
450	187		
500	207		
550	228		
600	240		

Support Frame with seat

Seat units are incorporated into the locker frame as well as slatted seats to the front. They can include a mesh shelf for footwear. Standard height is 400mm to match freestanding bench seating units.



Bridge Unit for Modular Lockers

Bridge Unit Top

This is fitted to adjacent lockers with nuts & bolts supplied. Incorporates a central full-length hanging rail with the option of 'captive' clothes hangers which cannot be removed, thereby preventing theft and accidental loss.

Height - 60mm	
Widths mm	Depths mm
600	300
900	450
1200	500
	550

Bridge Unit Base

A free-standing rack to support footwear or other items 150mm above the floor.





Support Frame

Locker support frames and seat units raise lockers off the floor, reducing impact damage and making cleaning easier. Support frames are manufactured from 25mm square steel tube in a welded construction and are painted light grey as standard to match the lockers. Standard height is 150mm, and widths and depths are designed to match the locker installation.



Colours and Finishes

BioCote® Paint Finish

Epoxy-polyester powder coat colours with BioCote® protection.

Red (RAL 3020)

Green (RAL 6001)

Yellow (RAL 1003)


Electric Blue (BS 20 E 51)

Standard Body colour is Light Grey (RAL 7035)



Light Grey (RAL 7035)

Standard Door Colours




Light Grey (RAL 7035)




Blue (RAL 5002)



Carmine Red (RAL 3002)





Black (RAL 9005)


Pastel Door Colours




Sunburst Yellow (BS 10 E 50)



Light Violet (BS 381 C 797)



Candy Pink (BS 02 C33)



Turquoise (RAL 6034)

Note: due to the limitations of matching painted steel to the printing process, colours illustrated on this page offer a good, but approximate guide. For exact colour reference, painted steel samples are available upon request.

Mild Steel Modular

Full Height



Single-Door

Internal fittings:

- Fixed top shelf.
- Fixed garment hanging rail (except 300mm deep).
- Two coat hooks.

Height - 1800mm	
Widths mm	Depths mm
225	300
300	380
380	450
450	500
	550
	600



Two-Door

Internal fittings:

- One intermediate fixed shelf.
- Each compartment has a fixed garment hanging rail (except for 300mm deep).
- Each compartment has two coat hooks.

Height - 1800mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	

Door **Options**

You can choose from a variety of door styles to tailor the locker to your specific situation.



Standard Duty Door

This flat mild steel door fits flush within the door frame – less than 2mm between door and frame (for compliance with BS 4680) to protect against leverage in attempted forced entry.



Perforated Door

Particularly useful where damp clothes and odours pose a problem.



Vision Door

Incorporates a toughened polycarbonate view panel set within a steel door with an all-round strengthened edge -allows you to see items stored in compartmentswithout compromisingsecurity.

lockers for maximum versatility




Three-Door

Internal fittings:

Two intermediate fixed shelves.

Height - 1800mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	





Four-Door

Internal fittings:

 Three intermediate fixed shelves.

Five-Door

Internal fittings:

Four intermediate fixed shelves.

		200	-	* (+
				8
				-
				8
				8
				8
				8
-	4	18		4%

Six-Door

225

300

380

450

Internal fittings:

 Five intermediate fixed shelves.

Height - 1800mm

Widths mm Depths mm

Height - 1800mm	
Widths mm	Depths mm
225	300
380	380
450	450
	500

Lock Options



Standard Deadlock

300

380

450

500

550

600

This simple and economical cam lock provides user access with a small, easily replaced key. The lock is supplied with two keys and a master key is available.



Hasp & Staple Padlock Fitting

Transfers responsibilty for locking to the user. The user is required to secure the locker with a padlock (not supplied). This system provides flexibility at the loss of some control over allocation of lockers.



Three Quarter Height

Single-Door

Internal fittings:

 Compartment has a fixed garment hanging rail with two coat hooks.

Height - 1382mm	
Widths mm	Depths mm
225	300
300	380
380	450
450	500
	550
	600



Internal fittings:

 Two intermediate fixed shelves.

Height - 1382mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	

Half Height



Single-Door

Internal fittings:

 Compartment has a fixed garment hanging rail with two coat hooks.

Height - 900mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	



Two-Door

Internal fittings:

 One intermediate fixed shelf.

Height - 900mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	



Coin/Token Return Lock

Ideal when lockers have 'shared' users. The key is released when coin $(\pounds (E))$ or token is inserted. Key is captive again when the door is reopened and the coin/token is returned to the user.



Coin/Token Retain Lock

Generates revenue from 'shared' user lockers. The key is released when coin (£/€) or token is inserted. Key is captive again when the door is reopened. Coin/token is retained in the box.



Mastered Combination Lock

Provides a keyless system for a single user. Turning the tumbler to each of the number settings releases the lock. Supplied with combination number, instructions and override master key.



Digital Combination Lock

Simple-to-use, battery-operated keyless lock. Can be programmed for dedicated single-user or multi-user 'open access' mode. Personal entry code can be set and changed, whilst a preset master code ensures supervisor access.



Multi-user Combination Lock

Ideal for facilities where keys are not desirable. The lock can be reset whenever it is open. This allows the locker to be used by several people at different times throughout the day, reducing the number of locker compartments required and the need for keys.



Magnetic Catch Lock

For use in Primary schools or environments where risk of key loss is high and security minimal. Offers positive closure of the door.

Small Modular lockers

Quarto

Sixto

Cube




Three-Door

Internal fittings:

 Two intermediate fixed shelves.

Height - 900mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	
	600	





Height - 511mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	

Height - 372mm		
Widths mm	Depths mm	
225	300	
300	380	
380	450	
450	500	
	550	



Cubes - as the name suggests - have an equal height, width and depth allowing combined stacking of units on the floor or on support frames.

Heights - 300, 380 or 450mm			
Widths mm	Depths mm		
300	300		
380	380		
450	450		



Full height lockers with Sixto lockers for additional under-seat storage.

Quarto and Sixto lockers can be fitted on top of lockers to increase available storage height with additional compartments.





Cube lockers are ideal for stacking, creating banks of individual compartments.

Locker Room Design

Features of the locker room


The size, location, fixtures & fittings of the area or room designated for the lockers will affect the positioning and layout of the lockers. Take into account the following:

- Is the room or area large enough to accommodate the number (and size) of lockers required, whilst still leaving enough space for users to have easy access?
 - *Note:* ensure that the space is not confined, making the lockers awkward or uncomfortable to use, and the room potentially hazardous in an emergency evacuation situation (in response to a fire alarm, for example).
- Is the room or area accessible to groups of people who may all arrive at one time? Are any adjacent corridors, stairs or lifts easy to get to and move through? Is the room readily accessible for delivery and installation of the lockers?
- Take into account the position of doors and windows and their effect on the locker layout.
 - Note: the position of fixtures and fittings which could either obstruct the lockers or be obstructed by them. For example: ceiling pillars, low ceilings, alcoves, beams, skirting boards, radiators & heating pipes, light switches, sockets and other power outlets, lighting fixtures, ventilators and air-conditioning units, any access to service points.
- Check the condition of the floor What is it made of? Is the surface suitable and in good condition? Is it level: lockers should always be located on a level, even floor. If there is significant slope, consider locating the lockers on support frames with adjustable feet.
- How are the floors cleaned? Even in a generally 'dry' changing area, the floor may be washed or mopped down from time to time. Where floors may be left damp for some time and on a regular basis, consider raising the lockers from the floor on a support frame which has a protective finish against corrosion.
- Assess the lighting ill-lit locker rooms can appear oppressive and unwelcoming. Carefully assess the positioning of lockers and their effect on lighting - avoid creating areas of dark or shadow in the room, particularly in corners. If there is natural light, make the best use of it. How is the artificial light provided? Will it conflict with the locker layout? If so, can the lighting be altered or the locker layout changed?

Locker Run Spacing

Lockers standing on the floor should be positioned so that there is a clear space or aisle at least 900mm wide - but preferably 1000mm - between the locker fronts and the opposing fixture - this could be a parallel run of lockers, or a corridor wall. Always allow clearance for wide-open doors - this varies according to the locker width.

Where space is available, the width of the aisle can be increased up to 1500mm where facing lockers are likely to be used simultaneously.

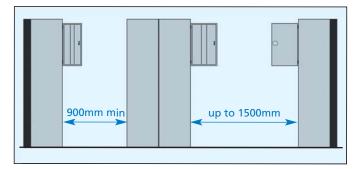

Lockers standing on support frames fitted with a seat should have a minimum aisle width of 900-1000mm between seats, but a spacing of 1200mm is desirable if facing lockers are to be used simultaneously.

Requirements for usage

Consider the following at the initial planning stage:

- How many people in all have a requirement for a locker?
- Do people require their own personal locker or can the lockers be shared? - for example, to cater for shift workers
- When will the lockers be used? are they required on a regular daily basis, or infrequently?
- Accessibility: what would be the maximum number of people requiring access to the lockers at any one time? - is additional space required to prevent overcrowding at 'peak times' - during the the changeover of work shifts, for example
- What kinds of items of clothing, equipment, personal possessions or carrying bags will users bring into the locker room? This will help determine the size of compartment/s required and also the locker and floor spacing - for example, where bulky clothing or equipment is involved, more floor space may be necessary for ease of movement
- What kind of access and 'ownership' is required for the lockers? This will influence the type of lock used: where an individual has their own locker, a cam-lock or padlock can be fitted, operated by the owner's key; where lockers are for shared use, coin or token-operated locks may be preferred as easier to administer
- What degree of privacy is appropriate? people may need to change their clothes, in part or in full
- Is there a requirement for seating?
- Is there a requirement for 'shared' clothes hanging facilities within the locker room?

Locker Nesting

Lockers are supplied as nested units - lockers of the same overall dimensions, sharing common side panels, manufactured and supplied fitted together.


This saves on the steel used, giving you the most economical solution.



Overall Dimensions

When planning a locker room layout, allowance should also be made for the incremental increase in the overall length of locker runs, where nested units are butted together.

2mm is added to the overall length at each point where two nested units join together (refer to example illustrated, below).



Utility Lockers

Utility



Uniform Locker

Internal fittings:

- Fixed top shelf.
- Central divider.
- Hanging rail and hook.
- Three fixed shelves.

Height - 1800mm			
Width mm Depth mm			
450	450		

- Also available sloping tops, see page 4.
- Choice of door colours, see page 5.
- Fitted with Deadlock as standard.
 Optional locks, see page 6 for details.



Clean & Dirty Locker

Internal fittings:

- Fixed top shelf.
- Central divider.
- Both divided compartments have a garment hanging rail and coat hook.

Height - 1800mm			
Width mm Depth mr			
450	450		

Two Person Locker

Internal fittings:

- Users have a three quarter length compartment with a separate full width compartment opened with the same key.
- Hanging compartment has two coat hooks.

Height - 1800mm			
Width mm Depth mm			
450	450		



Police

We also offer a variety of Police locker solutions. From the storage of 'Airwave' radios to PSU bags we have the right solution for Police forces throughout the UK.

Height - 1800mm		
Width mm	Depth mm	
450	600	
600	600	

Crew



Work Wear Locker

Internal fittings:

 Top shelf, divided compartment below, with one fixed shelf and hanging rail to either side.

Height - 1800mm		
Width mm Depth mm		
380	450	



Two compartment

Internal fittings:

- Fixed heavy-duty top shelf.
- The hanging compartment has a heavy duty hanging rail.

Height - 1800mm		
Width mm	Depth mm	
450	600	
600	600	



Four compartment

Internal fittings:

- Fixed heavy duty top and lower shelves.
- Divided compartments.
- Heavy duty hanging rail.

Height - 1800mm		
Width mm	Depth mm	
600	600	





Police Locker with:

- Airwaves compartment
- CS Cannister holder



Medium Duty Lockers


The medium duty design raises the standard duty ranges to a higher level of protection.

Enhancing the already robust design of the Standard Duty steel locker, the uprated medium duty versions have an additional vertical reinforcement channel and a shielded front of double-gauge steel for triple thickness protection.

This toughened design provides additional defence against the twin problems of vandalism and theft.

- Second channel section welded to the inside of the door to provide triple thickness strength.
- This significantly increases the reinforced area of the door's width and height and makes the door extremely difficult to deform, providing additional protection against forced entry.
- The form of the of the channel is extended across both sides of the door it doubles the gauge of the steel to resist impact damage.
- Also available sloping tops, see page 4.
- Choice of door colours, see page 5.
- Fitted with Deadlock as standard.
 Optional locks, see page 6 for details.

	₩	€	₩		
			W	₩	₩
		•			
		The state of the s			
		.			0
4		<u> </u>			
		**	₩	₩	***

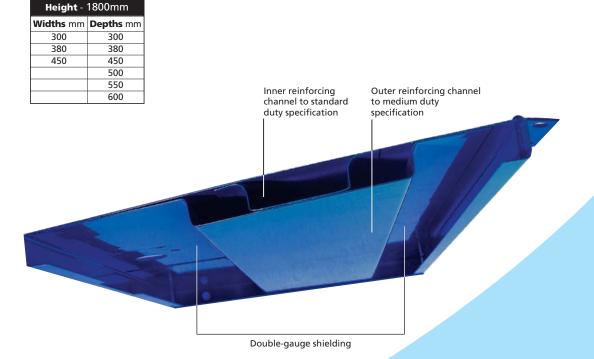

Stronghold Heavy Duty Lockers

Combining robust design with a heavy gauge 'double skin' door to guard against leverage and impact, Stronghold lockers are hard to beat when it comes to long-lasting security.

- Heavy-duty 5-knuckle hinge welded to the door, but rivetted to the frame to allow for easy replacement.
- Single compartment lockers, fitted with hat shelf and hanging rail with double coat hook as standard.
- Two compartment lockers have double coat hook in each compartment.
- Choice of door colours, see page 5.
- Fitted with Deadlock as standard.
 Optional locks.

Hasp & staple fitting (for use with own padlock). Coin/token operated locks.

See page 6 for details.













Garment Dispensers and Collectors

The managed issue of workplace clothing - often via third party laundries - is an essential part of hygiene procedure in many sectors. Integral BioCote protection (see page 3) on all our garment issue lockers provides a valuable additional benefit to these industries.

- Also available sloping tops, see page 4.
- Choice of door colours, see page 5.
- Fitted with Deadlock, with 2 keys.





Designed initially for work wear, these lockers are equally suitable for the controlled issue of safety equipment, consumables or specific materials required for a working day or shift.

Individual Access

Garment issue lockers provide each worker with key access to their secure compartment to collect a freshly laundered issue of clothing. Compartment doors are inset within the main full-height door, which remains locked.

Convenient Re-supply

The full-height main door allows access to all of the individual compartments for re-stocking with laundered clothing.

Laundry Collection

Workers 'post' their used garments into an adjacent Collection locker. These are collected in a laundry bag (not supplied with lockers). This separation of clean and used items can make a major contribution to maintaining a hygienic working environment.





angled inside 'post slot'. Hooks for laundry collection sack (sack not included).

5-Door Collector & Dispenser

- Half-height upper 'issue' door with 5 compartments. Lower 'collector' door with 'post slot'.
- Hooks for laundry collection sack (sack not included).



5-Door Dispenser

20-Door Dispenser

Laptop Lockers

These purpose-designed locker units provide a safe sanctuary for laptops and real peace of mind for users.

- 15 compartment locker has each door reinforced fitted with its own key-operated cam lock ('dead locking').
- S
- Single door locker version allows access to all compartments under one key.
- 15 compartment lockers accept laptops WITHOUT carry cases.
- Laptop lockers are available with optional hardwiring for power and networking, allowing computers to be recharged while being stored.
- Also available sloping tops, see page 4.
- Choice of door colours, see page 5.
- Fitted with Deadlock as standard.
 Optional locks.

Hasp & staple fitting (for use with own padlock)
Digital combination lock (4 door only).
Coin return lock (4 door only).
See page 6 for details.



Single-Door Locker

Compartment size
90h x 285w x 425d mm

Height - 1778mm		
Width mm	Depth mm	
381 457		



Fifteen-Door Locker

Compartment size

90h x 285w x 425d mm

Height - 1778mm	
Width mm	Depth mm
381	457



Also available, optional factory fitted, full-height protective steel channel kit to cover all locks. Requires padlock.

Persona Item Lockers





Personal item lockers provide secure storage for small but valuable possessions in public areas and throughout the working environment.

- Choose from 4 or 8 doors in nests of 1 or 2.
- Units can be hung on walls, fitted on top of each other or side to side.
- Choice of door colours, see page 5.
- Fitted with Deadlock as standard.
 Optional locks.

Hasp & staple fitting (for use with own padlock). Digital combination lock (4 door only). Coin return lock (4 door only). See page 6 for details.

*Height rises to 975mm with sloping top.



Perforated Door



Plain Door



Post Lockers

- Allows sorted mail to be posted into secure compartments which are opened on the recipients key.
- 10 or 15 tier lockers.
- Individual doors are set within a main door, which is opened on its own key giving access to all of the interior.
- Choice of door colours, see page 5.
- Fitted with Deadlock, with 2 keys.

Height - 1800mm	
Width mm	Depth mm
381	457

Laminate Door Lockers

Combines the versatility of steel lockers with the durability of solid grade laminate doors.

- Solid grade laminate material offers a robust, elegant solution with a range of colours and material designs, to satisfy all requirements.
- Choice of door styles.
- Plant-on doors cover the front face of the locker carcase creating a wall of colour.
- Inset doors offer a full-length hinge to provide continuous support for the door and provides a visual contrast between the door finish and the locker frame.
- Fitted with Deadlock as standard. Optional locks. Digital combination lock. Coin/token operated locks. See page 6 for details.



Plant-On Door



₩

**



Height - 1800mm		
Widths mm	Depths mm	
225	300	
300	450	
380	500	
450	550	
	600	

Two Door Locker with **Plant-On Doors**

Two compartment lockers fitted with double coat hook in each compartment.



Four Door Locker with Inset Doors

Wooden Door Lockers

Standard Solid Grade Laminate

As standard we provide laminate doors using Trespa® Athlon material in the following colours.

Flat Door Finish









Poppy Red



Sand

Melon Yellow





Aqua Marine

Powder Blue





Speckled Door Finish





Speckled White

Speckled Sand







Speckled Powder B



Speckled

Wood Grain Finish









Wild Cherry



Wooden Door Lockers combine the strength and durability of steel lockers with the aesthetic appearance of wooden lockers.

Wooden door lockers provide an economical alternative to all wooden facilities, providing a clean, professional finished line presenting an all wood front. Matching end panels ensure the finished installation has a quality 'all wood' effect.

- Attractive profiled doors.
- Concealed self closing hinges.
- Fitted with Deadlock as standard. Optional locks.

Digital combination lock. Padlock fitting. Coin/token operated locks. See page 6 for details.

MFC Wood Grain Finishes

















Single-Door

Internal fittings: • Fixed top shelf.

- Fixed garment hanging rail (except 300mm deep).
- Two coat hooks.



Two-Door

Internal fittings:

- One intermediate fixed shelf.
- Each compartment has a fixed garment hanging rail.
- Each compartment has two



Four-Door Internal fittings:

 Three intermediate fixed shelves.

Aluminium Laminate Door Lockers

Lockers are designed to provide costeffective 'wet-area' personal storage solutions in leisure and sports facilities.

Withstanding humid atmospheres, these lockers have a superb finish to suit any architectural design.

- Lockers have clean lines and continuous colour across the changing area.
- 1800mm lockers available as 1, 2, 4 or 2 door above 2 quarter height doors and visa versa.
- 900mm high lockers available as 1 or 2 doors.
- Concealed hinges bolted to doors and frames.
- Single-piece body for easy internal cleaning and snag-free storage of clothes and personal belongings.
- Robust aluminium shelves riveted through the body for additional strength.
- 95^o custom-designed hinge.
- Maximum clear access into locker width due to the compact design of frame uprights.
- Gentle integral return spring on doors to avoid trapping hands or fingers; Doors have rounded, bull nose safe edges.
- Integral double coat hook and hanging rail.
- Choice of finishes, see page 17.
- Fitted with Deadlock as standard.
 Optional locks.
 - Digital combination lock. Coin/token operated locks. See page 6 for details.







Seating & Benching





Bench seating and accessories

An essential element of all changing facilities, our bench and seating range is available to meet all your needs from mild or stainless steel frames to solid wood, composite or solid grade laminate slats.

You can choose from:

- Free-standing benches
- Wall-mounted back rest and clothes hook boards
- Single or double-sided free standing seat units with back rest & hook board
- Cantilever wall bench
- Locker support frames with integral seating



Support Frame with Seat

Seat units are incorporated into the locker frame as well as slatted seats to the front. They can also include a mesh shelf for footwear. Seats are a standard depth of 300, 400 or 450mm and standard height is 400mm to match freestanding bench seating units.

Standard Cupboards



A versatile and robust range of steel cupboards providing secure storage in the workplace.

Cupboards meet the stringent requirements of BS EN 14073:2004 (Parts 1, 2 & 3) and BS EN 14074:2004. Cupboards feature:

- Door vertical stiffening for added strength
- Adjustable shelves on a 25mm vertical pitch
- Shelves carry a maximum of 78kg UDL
- Choice of door colours, see page 5



Handle designed for easier operation, allows door closing without the key



Three point locking as standard



Height - 984 or 1820mm	
Width mm	Depth mm
915	505


Security Cupboards



Where valuable and potentially vulnerable materials or equipment are used in the workplace, the need for storage equipment with enhanced security becomes a necessity. Security cupboards benefit from an additional hasp and staple fitting for use with a padlock (not supplied) as well as the standard 3 point locking.

Internal Layouts

Standard, Security, Slimline, Large Volume and Vision cupboards are all available in the internal configurations shown right. These offer a range of solutions to meet the need for secure storage around the workplace.



S14

 Height - 984 or 1820mm

 Width mm
 Depth mm

 915
 505

Slimline Cupboards

The practical solution where storage space is limited Slimline cupboards provide secure storage in a compact 'footprint'.

With the same all-steel design and features of standard cupboards, Slimlines are available with various internal configurations.

- Door vertical stiffening for added strength
- Adjustable shelves on a 25mm vertical pitch
- Shelves carry a maximum of 78kg UDL
- Choice of door colours, see page 5



Large Volume Cupboards


Spacious storage of larger items in the workplace

Large Volume Cupboards are available with various internal configurations and feature the following

- Semi-concealed hinges
- Magnetic door catches
- Door vertical stiffening for added strength
- High quality lock operating 3-point locking bars
- Shelves supported on clips, height adjustable on 25mm increments
- Robust, all-steel construction
- Choice of door colours, see page 5



Large Volume Cupboards have a high quality metal lock operation the 3 point locing system





Vision Cupboards

Lockers provide visible but secure storage suitable for most working environments to store tools, computer periperals, electronic components and high value items.

Based on the standard all-steel cupboards, with the addition of toughened polycarbonate view panels set within a steel door which has an all-round strengthened edge.

- Semi-concealed hinges
- Magnetic door catches
- High quality lock operating 3-point locking bars
- Shelves supported on clips, height adjustable on 25mm increments
- Robust, all-steel construction
- Choice of door colours, see page 5





 Height - 984mm

 Width mm
 Depth mm

 915
 505

Storage Cupboards

A useful range of smaller, practically sized low cupboards designed for general storage uses.

- Door vertical stiffening for added strength
- Adjustable shelves on a 25mm vertical pitch
- Shelves carry a maximum of 78kg UDL
- Choice of BioCote door colours, see page 5





- Ronis deadlock operating single point locking
- 1 adjustable shelf

Height - 684mm	
Width mm	Depth mm
450	300

3 point locking 2 adjustable shelves

Height - 984mm	
Width mm	Depth mm
480	505





Handle designed for easier operation, allows door closing without the key.

3 point locking 2 adjustable shelves

Height - 984mm	
Width mm	Depth mm
915	505



Too Cabinets

Versatile tool cabinets in four overall sizes with various combinations of painted drawers and galvanised shelves.

All cabinets feature a secure barrel lock, operating a 3-point locking system.

- Door has vertical stiffening for added strength.
- Choice of door colours, see page 5.



Extension drawers 90mm high with 25kg load capacity (evenly distributed). Safety stop allows extension up to 80%. Height adjustable in 25mm increments.



Shelves adjustable in 25mm increments. Safety stop allows extension up to 80%.



Rubber mat fitted to top of all low cabinets.



Optional desk unit is available for low single cabinets.



Mobile chassis for use with low cabinets.



Width mm Depth mm 915 505



Height - 984mm	
Width mm	Depth mm
480	505




Height - 1820mm Width mm Depth mm

505

915





C1661TGU--29S35 2 drawers, 2 shelves




C1661TGU--29S41 7 drawers, 1 shelf




C1661TGU--29S31 4 shelves



6 drawers, 6 shelves



C1961TGU--29S32 8 shelves



C1961TGU--29S38



C1961TGU--29S44 14 drawers, 2 shelves 4 drawers, 4 shelves





1 drawer, 2 shelves



2 drawers, 1 shelf



2 shelves



6 drawers



8 drawers



4 drawers, 1shelf





2 drawers, 4 shelves



CH661TGU--29S33 CH661TGU--29S34 CH661TGU--29S35 CH661TGU--29S30 CH661TGU--29S30 CH661TGU--29S37 CH961TGU--29S36 CH961TGU--29S38

Hazardous Substance Cupboards

Provide a secure facility for materials which are required to be stored when not in use.

Supplied with appropriate safety labelling, the highly visible yellow colour also ensures awareness of the potential danger of the materials stored and makes location in the workplace easy.

- Epoxy powder coating in high-visibility yellow RAL 1003
- Safety labelling in accordance with BS 5378
- Pull-out shelves, height-adjustable to accommodate stored material
- Perforated shelves to allow drainage into the sump
- Door vertical stiffening for added strength
- Sturdy all-steel construction

We also provide a range of cupboards for the storage of:



 Agrochemicals and pesticides



 Acid or alkaline chemicals




COSHH
 materials



Personal Protection
Equipment

Ranges are based on the sizes and construction of the hazardous substance storage cabinets. Colours indicate the type of material stored for quick identification within the workplace.





3-point locking as standard



Seam welded removable sump with carry handles





C1961HYDYD29S13

3 adjustable shelf

Height - 1820mm	
Width mm	Depth mm
915	505



C1661HYDYD29S13

3 adjustable shelf

Height - 1820mm	
Width mm	Depth mm
480	505



CH961HYDYD29S11

1 adjustable shelf

Height - 984mm	
Width mm	Depth mm
915	505



CH661HYDYD29S11

1 adjustable shelf

Height - 984mm	
Width mm	Depth mm
480	505



CA521HYDYD00S11

1 adjustable shelf

Height - 684mm	
Width mm	Depth mm
450	300



CA221HYDYD00S11

1 adjustable shelf

Height - 684mm	
Width mm	Depth mm
300	300



CA961HYDYD29S11

1 adjustable shelf

Height - 704mm	
Width mm	Depth mm
915	505



CA931HYDYD29S11

1 adjustable shelf

Height -	Height - 704mm		
Width mm	Depth mm		
915	355		



CA551HYDYD00S11

1 adjustable shelf

Height - 684mm		
Width mm	Depth mm	
450	450	



CQ521HYDYD00S00

Ronis deadlock with

No shelf

Height -	Height - 511mm		
Width mm	Depth mm		
450	300		



Tel: 0800 975 4933 / 0113 384 8777 Fax: 0113 384 8778 Email: sales@avantauk.com Web: www.avantauk.com

Avanta UK Ltd • Unit B1 • Astra Park • Parkside Lane • Leeds • West Yorkshire • LS11 5SZ









